

SLOAN WATERFREE URINAL



#05450

Sloan Waterfree Urinals reduce water and sewer costs, maintenance and repair bills, and create more hygienic, odor-free restrooms. A patented sealed cartridge eliminates the need for water, typically conserving 40,000 gallons per unit per year. Installing Waterfree Urinals along with other Sloan Conservation Products ensures meaningful water savings. In addition, Sloan Waterfree Urinals do not require costly piping to fixture.

DESCRIPTION

- Wall hung, wall outlet, Waterfree Vitreous China Urinal.

FEATURES

- Touch-free operation
- Uses no water
- Mechanical-free design
- Patented, Sealed Locking Cartridge
- Smooth, non-porous surfaces

BENEFITS

- Improved hygiene and safety
- Reduced water and sewer costs
- Water supply piping not required
- Odor-free
- Vandal resistant
- Minimal care and easy cleaning

SPECIFICATIONS

- Wall hung, wall outlet, Waterfree Vitreous China Fixture
- Housing (H-1-1.5-M3)
- Cartridge Kit - Engineered to last for at least 7000 uses
- Two Wall Hanger Brackets Included
- Uni-coupler (for new and retrofit installations)
- Tube of Adhesive Caulking

COLORS

- Standard White
- Consult Equiparts for optional colors

CARTRIDGE FILTER #05317



The Cartridge is engineered to last for at least 7000 uses and to receive waste through drain holes. Waste passes through an emissible layer of Sealant, continues through a Siphon Trap System, and flows out through a Patented Baffle to prevent the loss of Sealant. A discharge tube in the housing directs the flow of waste into the building drain system. The Cartridge is designed as a replaceable component when its function has been exhausted.

SLOAN WATERFREE URINAL SPECIFICATIONS

DESCRIPTION

- Wall hung, Wall outlet, Waterfree Vitreous China Urinal.

DIMENSIONS

- 19-1/4" (489 mm) x 14-3/8" (365mm) x 26-1/4" (667)


APPROXIMATE WEIGHT

- 65 lbs.

MOUNTING FOR ADA COMPLIANCE


- For lip height of 17", distance from finished floor to drain centerline must be 9"

UNI-COUPLER

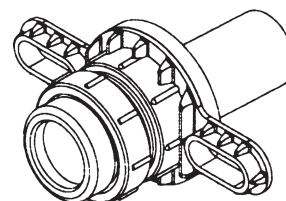


This adaptive coupler design enables the installer to connect the Uni-coupler directly onto the spud flange or in-wall nipple.

ROUGH-IN

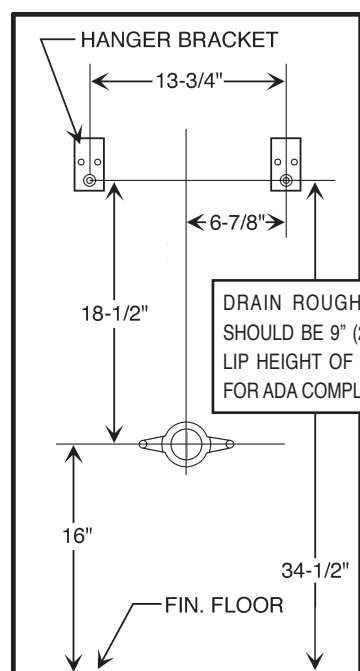


ROUGH-IN BRACKET LOCATION

DRAIN ROUGH-IN HEIGHT
SHOULD BE 9" (229 mm) FOR
LIP HEIGHT OF 17" (432 mm)
FOR ADA COMPLIANCE

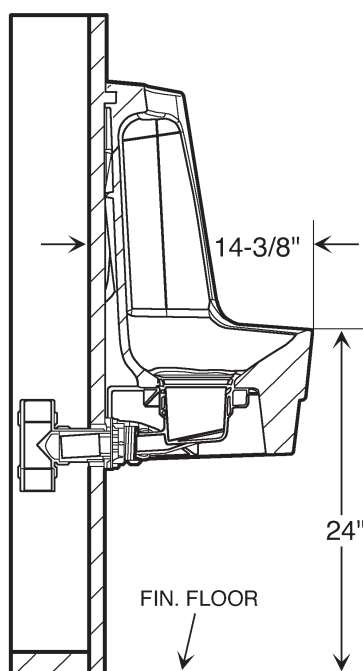

SIDE VIEW

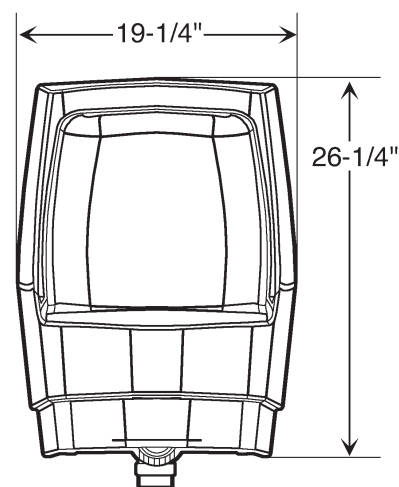

FRONT VIEW

MAINTENANCE AND CLEANING

- Perform cleaning once a day, or as needed.
- Remove any litter in the bowl and clear cartridge holes.
- Use mild disinfectant cleaner on a cloth to wipe the bowl.
- DO NOT use aggressive/concentrated detergents or any other chemicals.
- DO NOT dispose of water into the urinal.