


Aquaflush®	Ø
TAG	

## **Exposed Z6001 Model** for 1-1/4" Urinals

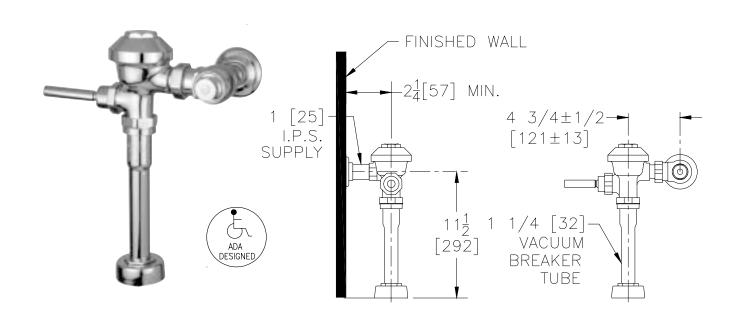

low		

- -WS1 1.0 Gal. Low Consumption
- -WS 1.5 Gal. Water Saver
- Standard Flush 3.0 Gallons Per Flush

## Suffix Options (Check/Specify Appropriate Options)

Solid Ring Pipe Support

 -BG	BioCare ADA Handle
-H	Handle on Front of Flush Valve
-L	1" [25] Metal Push Button
-L3	3" [76] Metal Push Button
-VC	Vandal Resistant Cover
-YB	Sweat Solder Kit
-YC	Cast Wall Flange
-YJ	Split Ring Pipe Support

Other

EQUIPARTS TOLL FREE: 800-442-6622 PITTSBURGH: 412-781-9100 www.equiparts.net

That Hard to Find Part is Right Here

-YK

ENGINEERING SPECIFICATION: ZURN Z6001 Aquaflush Exposed Urinal Flush Valve -Exposed, quiet diaphragm-type, chrome plated flushometer valve with a polished exterior. Complete with a chloramine resistant, dual seal diaphragm with a clog resistant by-pass. The valve is ADA compliant with a nonhold-open and no leak handle feature, high back pressure vacuum breaker, hex coupling nut and adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon-guard protection. Internal seals are made of chloramine resistant materials.

Z6001PL - Aquaflush Plus is furnished as specified above and includes sweat solder kit, vandal resistant stop cap, and cast wall flange.

This space is for Architectural/engineering Approval