

ZER6003AV-TM

Sensor Operated Urinal Flush Valve

Architectural/Engineering Specification:

The ZER EZ Gear-Driven Urinal Flush Valve is performance engineered with the dual action of the ceramic disc cartridge and motor gear-driven operation. Its polished chrome-plated finish, modern top-mount design, and quiet diaphragm operation are ideal for new and retrofit commercial restroom applications.

Product Features:

- Zurn's TPE diaphragm Clog resistant bypass Chloramine resistant
- · Proprietary dezincification-resistant, low lead-brass alloy
- Actuator

Electronic automatic sensor Gear-driven ceramic cartridge

- Manual Override Button
- Control Stop

Internal siphon-guard protection Vandal-resistant stop cap Sweat solder kit Cast wall flange with set screw

Vacuum Breaker

High back pressure
One piece hex coupling nut

- · Chloramine-resistant internal seals
- Adjustable tailpiece
- Spud coupling and flange for top spud connection
- Operating Pressure

25 psi (running) - 80 psi (static)

Higher running pressure may be required for some fixtures. Consult fixture manufacturer for details.

Compliance and Certification:

- ADA Compliant
- ASSE 1037/ASME A112.1037/CSA B125.37
- cUPC
- Texas Accessibility Standard (TAS)
- · WaterSense Compliant









* This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.



Flow Options:

	Flush Volume	WaterSense Labeled
-ULF*	0.125 gpf	✓
-EWS*	0.5 gpf	✓
-WS1	1.0 gpf	

Power Options:

-Battery (Standard)

Suffix Options:

-YJ Split Ring Pipe Support -YK Solid Ring Pipe Support

-Other



Architectural/Engineering Approval

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements. In Canada - Consult local codes and standards.

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.






Sensor Operated Urinal Flush Valve

TAG _____

Rough-in dimensions/Overview dimensions

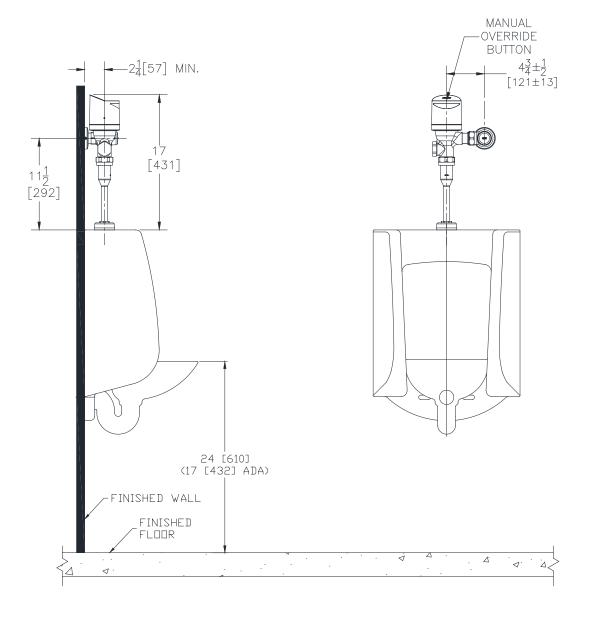

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements. In Canada - Consult local codes and standards.



