

### DESCRIPTION

- Brass spout and metal handle construction with Chrome finish
- 3/8" compression stainless steel supply lines
- No lift rod hole in models without drain
- Vandal resistant aerator and handle assembly
- Red and Blue plastic indicator inserts

### OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel

### FLOW

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
  - ° 1.2 gpm max (4.5L/min) at 60 psi

### CARTRIDGE


- 1255 Duralast™ cartridge with brass adjustable temperature limit stop
- Nonmetallic/nonferrous and ceramic material

### STANDARDS

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handle

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations



**M•Dura™**  
**Single-Handle Lavatory Faucet**

Model	Flow (gpm)	Drain	WaterSense®
9417F12	1.2	Without	X
9419F12	1.2	All Metal	X


**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/4" MIN. DIA.





**TOLL FREE: 800-442-6622**  
**PITTSBURGH: 412-781-9100**  
[www.equiparts.net](http://www.equiparts.net)

*That Hard to Find Part is Right Here!*

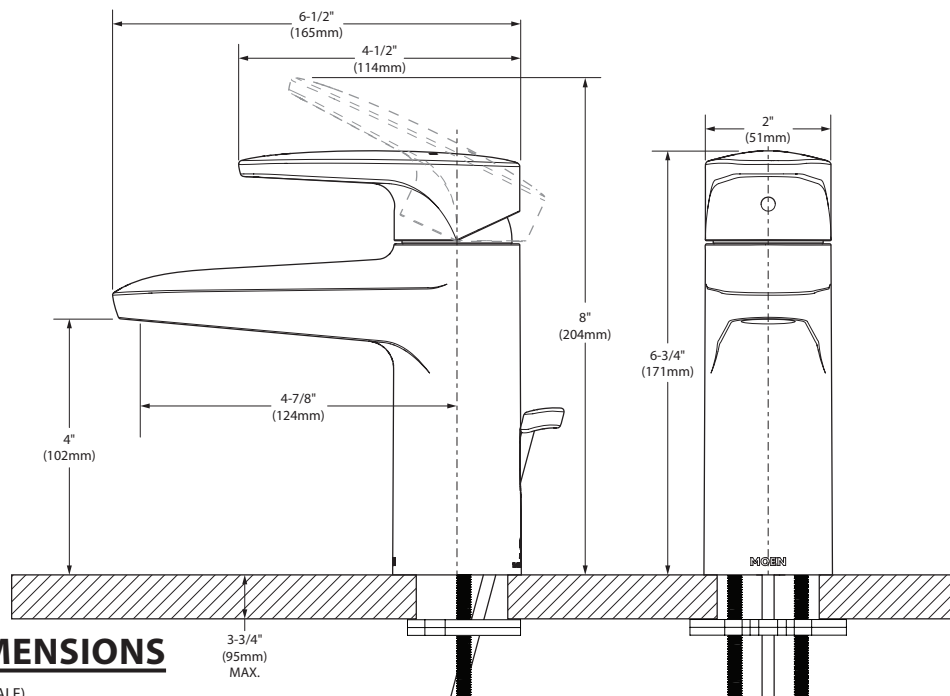

### CRITICAL DIMENSIONS

(DO NOT SCALE)